



AUDEX

AS RANGE

Industries and Applications

The Audex AS range of submersible pumps are pre-dominantly used in quarrying for general duties such as handling dirty water or wash-plant feed. AS pumps are additionally used in mining, civil engineering and construction. Audex AS models with a power rating ranging from 22kW to 75kW are also suitable for pre-dewatering of deep wells and high head dewatering.

Pump Performance



Audex AS pumps provide you with a highly reliable and efficient solution with minimal running costs and repairs. Along with a rugged build utilising wear-resistant materials, they offer an impressive performance: achieving a discharge of up to 16,000 litres/minute with a head of up to 130m.

Build and Design

Reliable, industry-proven and affordable, Audex AS pumps are available in a range of sizes, from 3" to 10" discharge. This durable range of pumps have cast-iron bodies and motors, while their mechanical seals are resistant to high pressures, allowing the pumps to be deeply submerged. A semi-open impeller made from high chrome and ductile-iron wear plate improve durability. The pump motors are hermetically sealed. The AS 10-5500 TR has an outer casing made of epoxy coated steel and features nitrile rubber lined diffuser/wear plate. All AS pumps have a top outlet allowing the user to submerge the pump in a confined area if needs be, while the pumps are fitted with lifting eyes for quick and easy deployment and suspension.

Designed with your industry in mind

Audex AS Pump Curves

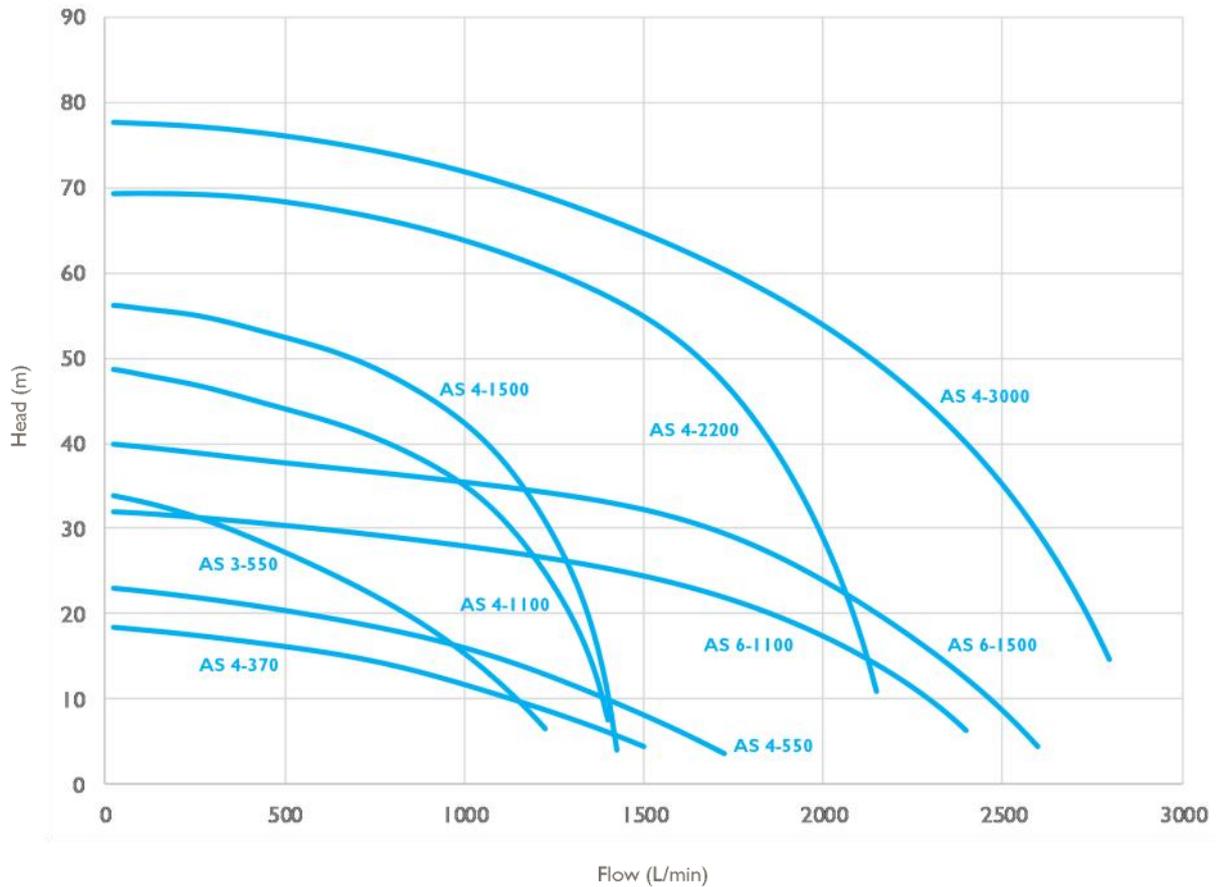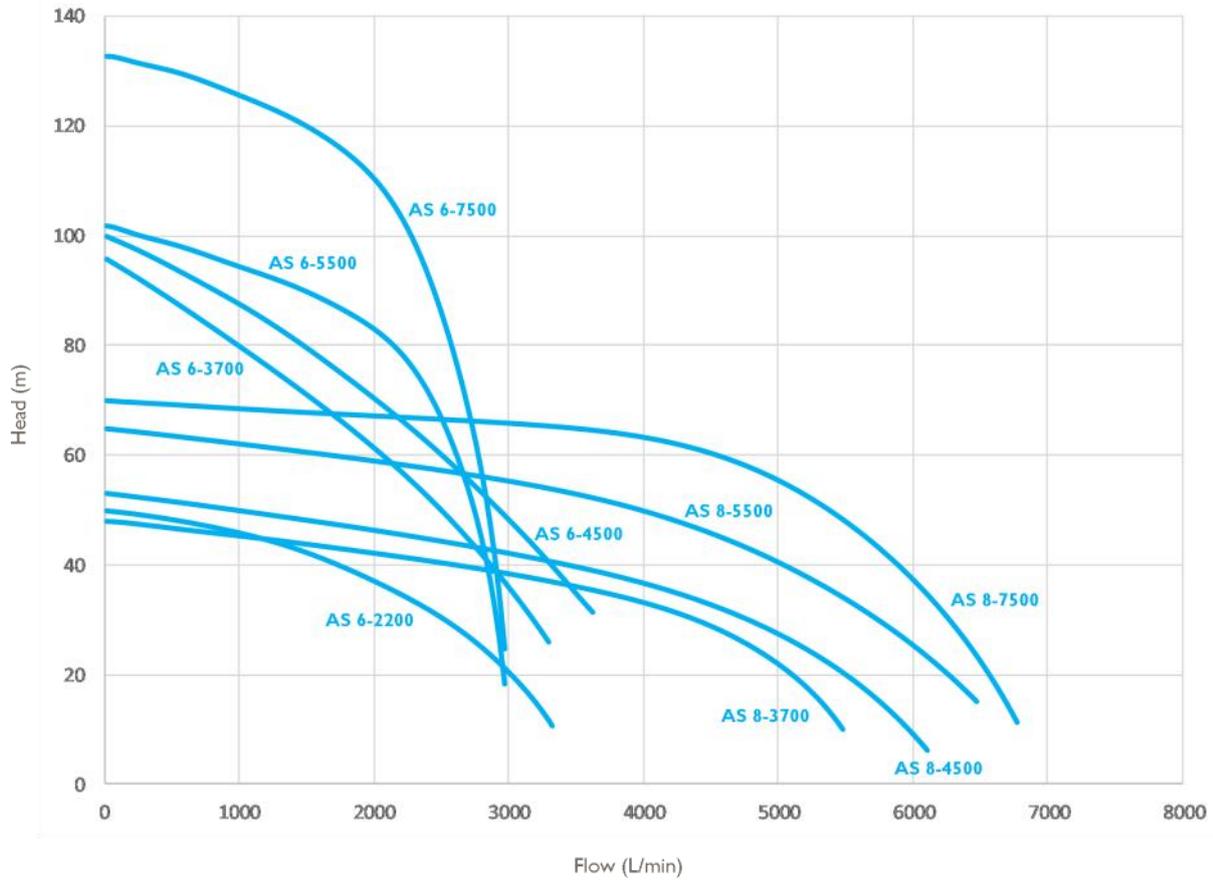

Please note: both the AS 2-220 TC and AS 10-5500 TR do not feature on the above curves. Please refer to the specific data sheet for these curves.

Contact

For further information on the Audex AS range of pumps or any range or product, please contact Atlantic Pumps on +44 (0)1246 284 420 or email info@atlanticpumps.co.uk