



AUDEX

AW RANGE

Industries & Applications

Audex AW pumps are submersible pumps with agitators ideal for handling dirty water and slurry. They have been designed and built for use in the abrasive applications found on quarries, recycling plants and on ready mixed concrete sites. Reliable, industry-proven and affordable, the pumps offer exceptional service life with minimum running costs and repairs.



The Audex AW Range

The Audex AW 2-040 (2") and the AW 3-075 (3") submersible dewatering pumps are predominantly used as contractor pumps for site drainage duties, for example where the water contains sand and silt in suspension. A ductile iron vortex impeller is fitted to both models, which enables solids handling and offers excellent wear resistance. A built-in shaft mounted agitator keeps the solids in suspension and minimises clogging. The larger Audex AW pumps, 2-150 to 8-2200, are heavy-duty submersible slurry pumps ideal for the harsh conditions found in heavy industries such as quarries or recycling plants. They have a top discharge enabling installation in confined spaces. They come with cast-iron impeller and wear plates for increased lifetime, and a cast-iron agitator for smoother pumping of solids-laden fluids.

Also available from Audex is the AW Pro range which consists of four dirty water submersible pumps. The AW Pro range includes all of the features of the AW range plus an intelligent control system (ICS) giving you complete protection for your pump.

Designed with your industry in mind

Audex AW Pump Curves

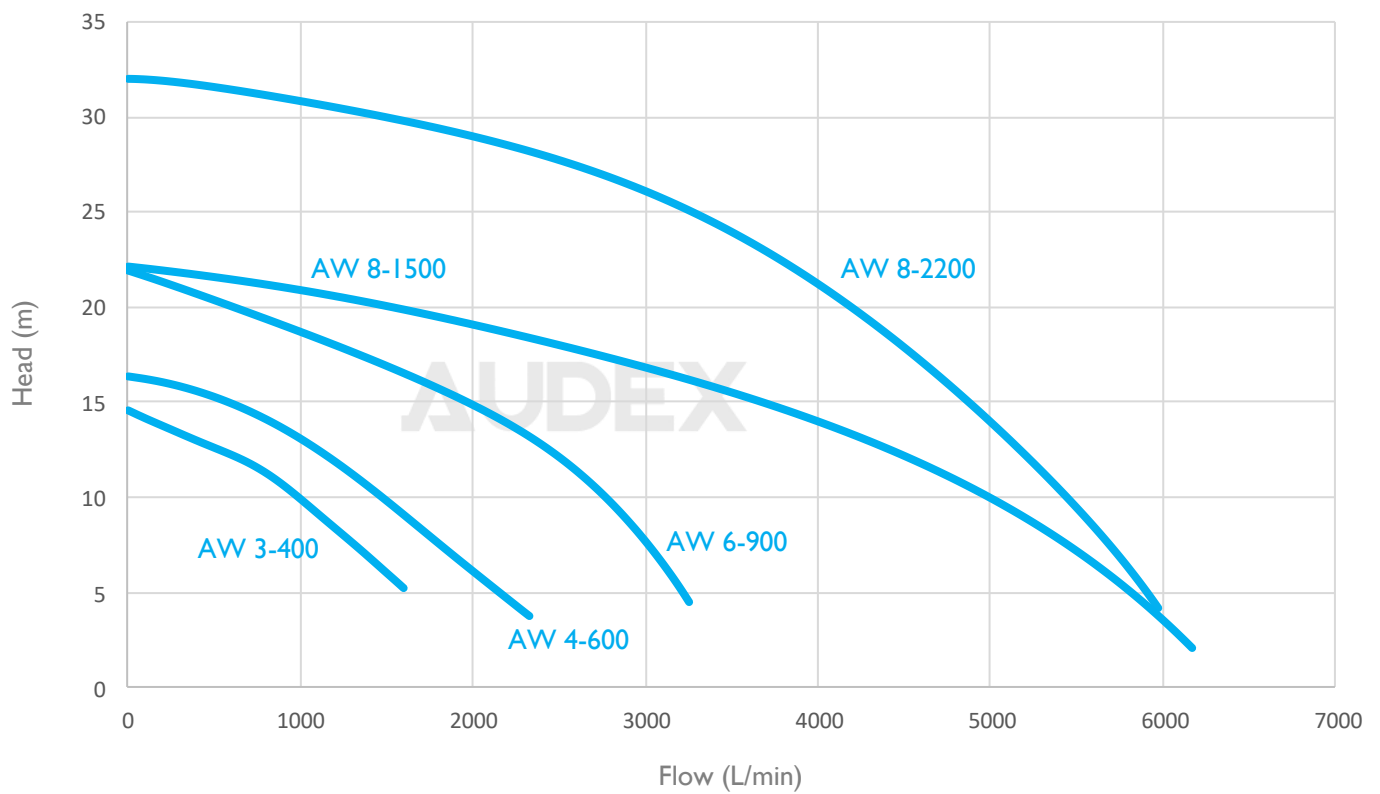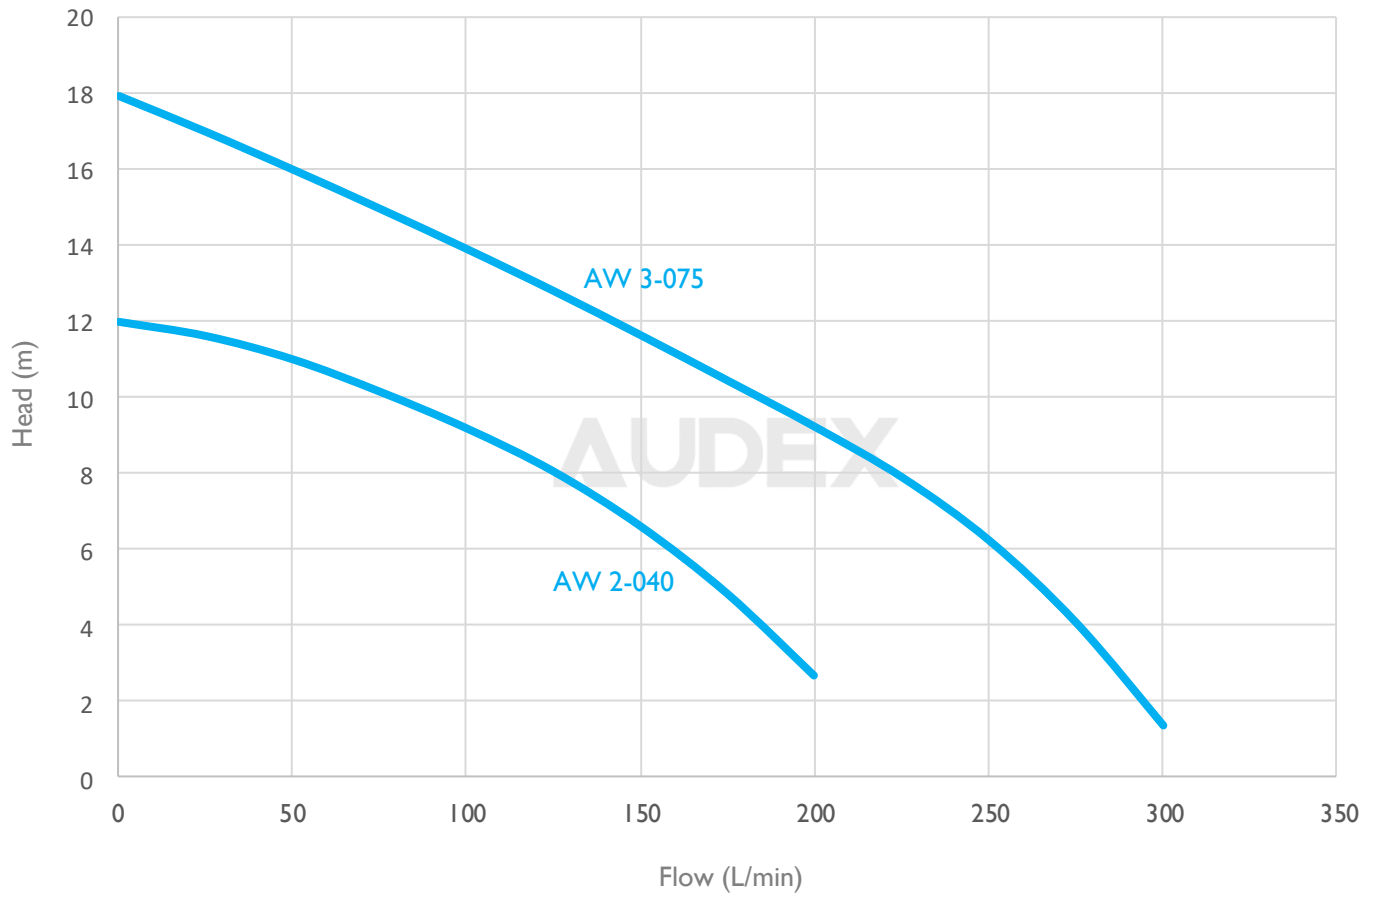

Contact

For further information on the Audex AW range of pumps or any range or product, please contact Atlantic Pumps on +44 (0)1246 284 420 or email info@atlanticpumps.co.uk